


# REGULUS 2"

## TRIMLESS REGRESS SLIM

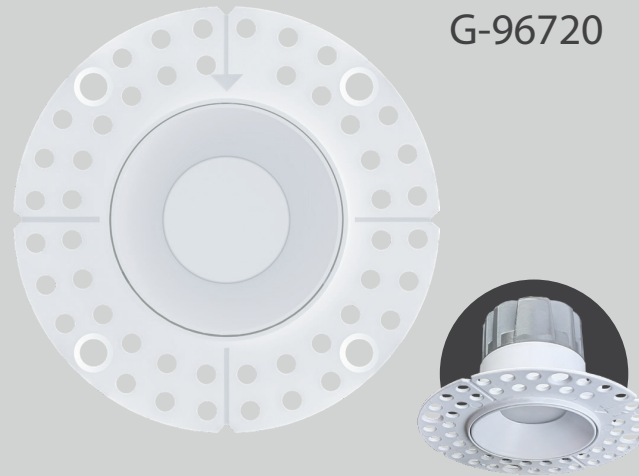

G-96720

ITEM	G-96720				
DESCRIPTION	RS2/WS2/R/LED/TL/5CCT	BEAM ANGLE	120°	CUTOUT	2.28"
COLOR TEMP	27, 30, 35, 41, 50k	CRI	90+	mA	180/3 10
OUTPUT LUMEN	550/825	DIMMABLE	Triac Or 0-10V	OUTPUT VOLTS	33-38V
INPUT VOLTS	120-277V	OD	3.94"	PLATE	G-19975 (1)
WATTAGE	8W/12W	HEIGHT	2.32"	PACK	18

### Content

2" Trimless Regress Slim

Selectable CCT \_\_\_\_\_ 1

Accessories \_\_\_\_\_ 2

Dimensions \_\_\_\_\_ 2

Installation Instructions \_\_\_\_\_ 2

Dimmer List \_\_\_\_\_ 3



Lifetime:  
50,000 hours



Dimmable: 5%  
Triac or 0-10



Warranty:  
3 years




Multi Volts:  
120-277V





**CONTRACTOR DIRECT**  
LIGHTING

## Accessories



Emergency LED Driver

15W G-48410

60W G-95521

30W G-48411

25W G-95525



Multi Driver Converter

G-95823 8W/ G-95824 12W



Extension Cords

G-20247 5ft

G-19822 20ft

G-20248 10ft


G-19823 30ft










New Construction Plate

G-19975

## Dimensions

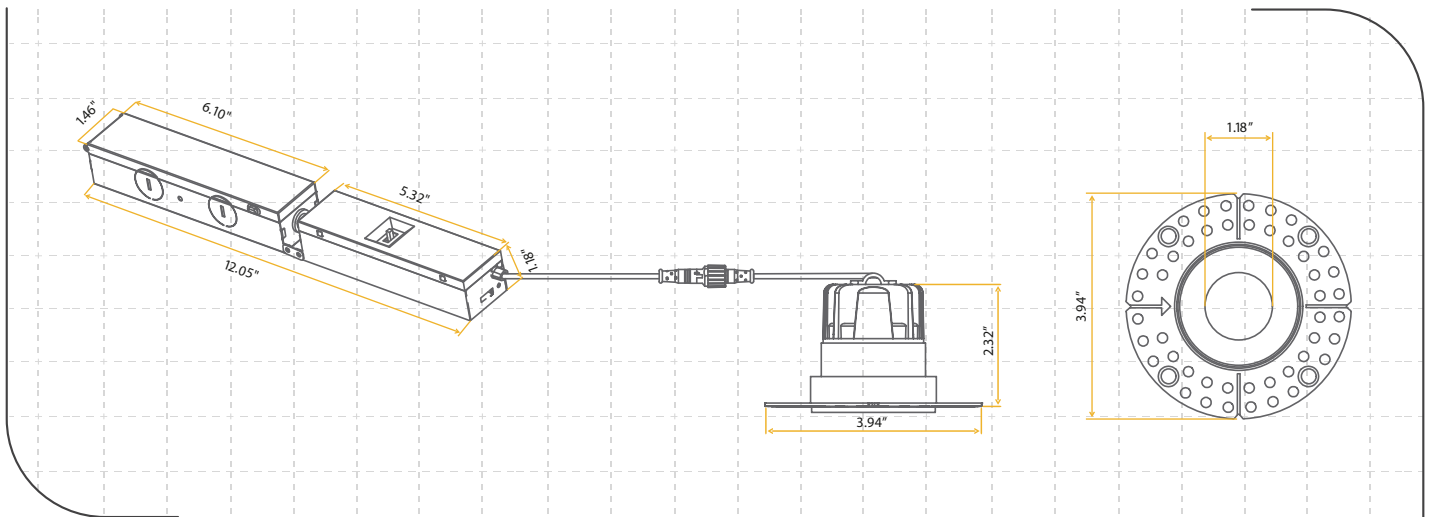

## Installation Instructions






CONTRACTOR DIRECT  
LIGHTING

# Trim Replacement Covers

Black



G-22120 2"  
T/RL/2/SQ/CV/BK

G-48461 4"  
RT4/SQ/COVER/BK


G-22160 6"  
T/RL/6/SQ/CV/BK

G-22130 3"  
T/RL/3/SQ/CV/BK


G-22150 5"  
T/RL/5/SQ/CV/BK

## Dimensions

G-48509 2"

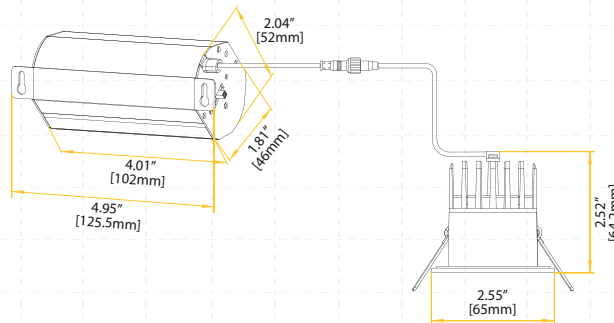

G-48338 3"

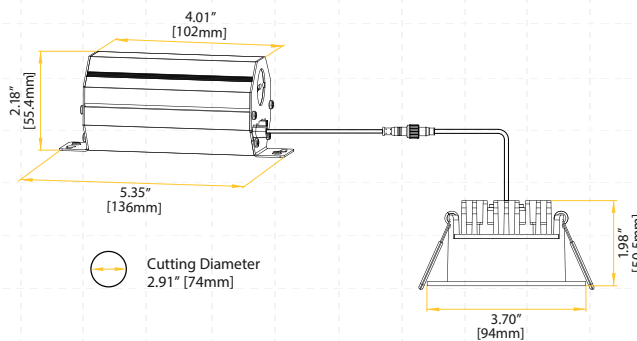

G-20244 4"

