

REGULUS 2"

TRIMLESS REGRESS SLIM DL 2014



G-96720

ITEM	G-96720				
DESCRIPTION	RS2/WS2/R/LED/TL/5CCT	BEAM ANGLE	120°	CUTOUT	2.28"
COLOR TEMP	27, 30, 35, 41, 50k	CRI	90+	mA	180/3 10
OUTPUT LUMEN	550/825	DIMMABLE	Triac Or 0-10V	OUTPUT VOLTS	33-38V
INPUT VOLTS	120-277V	OD	3.94"	PLATE	G-19975 (1)
WATTAGE	8W/12W	HEIGHT	2.32"	PACK	18

Content

2" Trimless Regress Slim

Selectable CCT _____ 1

Accessories _____ 2

Dimensions _____ 2

Installation Instructions _____ 2

Dimmer List _____ 3



Lifetime:
50,000 hours



Dimmable: 5%
Triac or 0-10



Warranty:
3 years



Multi Volts:
120-277V





CONTRACTOR DIRECT
LIGHTING

Accessories



Emergency LED Driver

15W G-48410

60W G-95521

30W G-48411

25W G-95525



Multi Driver Converter

G-95823 8W/ G-95824 12W




Extension Cords

G-20247 5ft

G-19822 20ft

G-20248 10ft


G-19823 30ft










New Construction Plate

G-19975

Dimensions

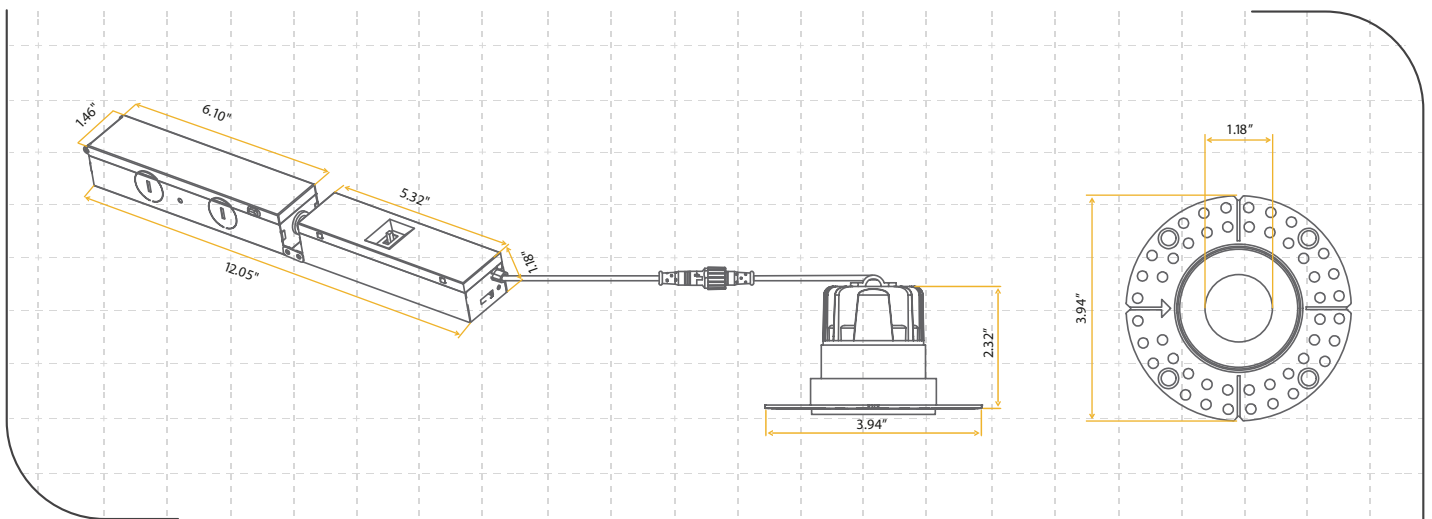

Installation Instructions

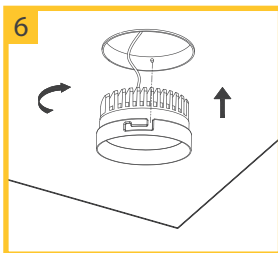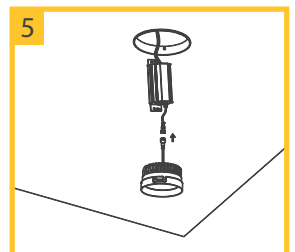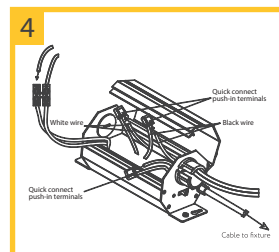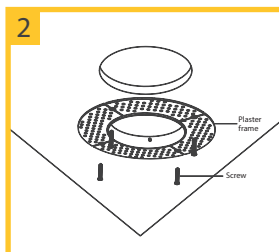




CONTRACTOR DIRECT
LIGHTING

Trim Replacement Covers

Black



G-22120 2"
T/RL/2/SQ/CV/BK

G-22130 3"
T/RL/3/SQ/CV/BK


G-48461 4"
RT4/SQ/COVER/BK

G-22150 5"
T/RL/5/SQ/CV/BK


G-22160 6"
T/RL/6/SQ/CV/BK

Dimensions

G-48509 2"

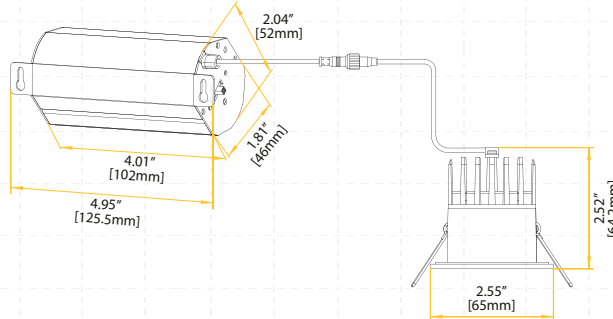

G-48338 3"

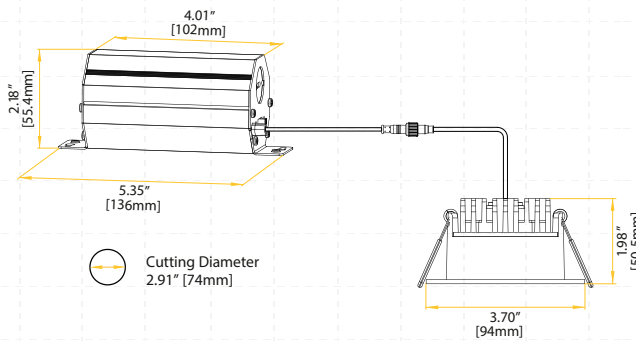

G-20244 4"

