



CONTRACTOR DIRECT LIGHTING

LED SPOTLIGHT-CANLESS REGRESSED INTERCHANGEABLE TRIM 4" MODULE



INTERCHANGEABLE TRIMS

*SOLD SEPARATELY



CRI 90

COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K


DIMMABLE
TRIAC

IC RATED


AIR TIGHT

WET LOCATION RATED


3 YEAR WARRANTY




MODULE



MODULE + TRIM

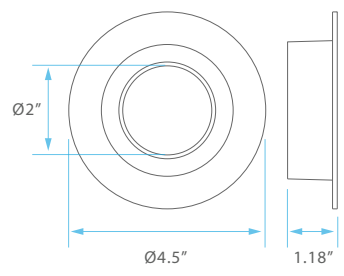

ROUND TRIM REPLACEMENT

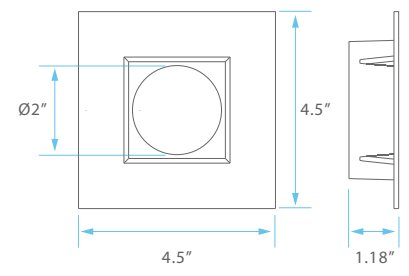

SQUARE TRIM REPLACEMENT

CUTOUT: Ø 3.75"


ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	FLOOD	LIFETIME	COST/YR
NARROW	LR24950	LED/DLMD4/5CCT/D	15	120V	73	40°	50,000	\$ 1.81
WIDE	LR24951	LED/DLMD4/5CCT/D/WFL	15	120V	73	60°	50,000	\$ 1.81

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL	ENERGY STAR	PLATE (KNOCKOUT)
LR24950	LED/DLMD4/5CCT/D	2700K/3000K /3500K/4000K/5000K	CCT SELECT	1100	90	YES	YES	LR41004 (#2) LR41006 (#2)
LR24951	LED/DLMD4/5CCT/D/WFL	2700K/3000K /3500K/4000K/5000K	CCT SELECT	1100	90	YES		LR41010 (L2)

INTERCHANGEABLE TRIMS

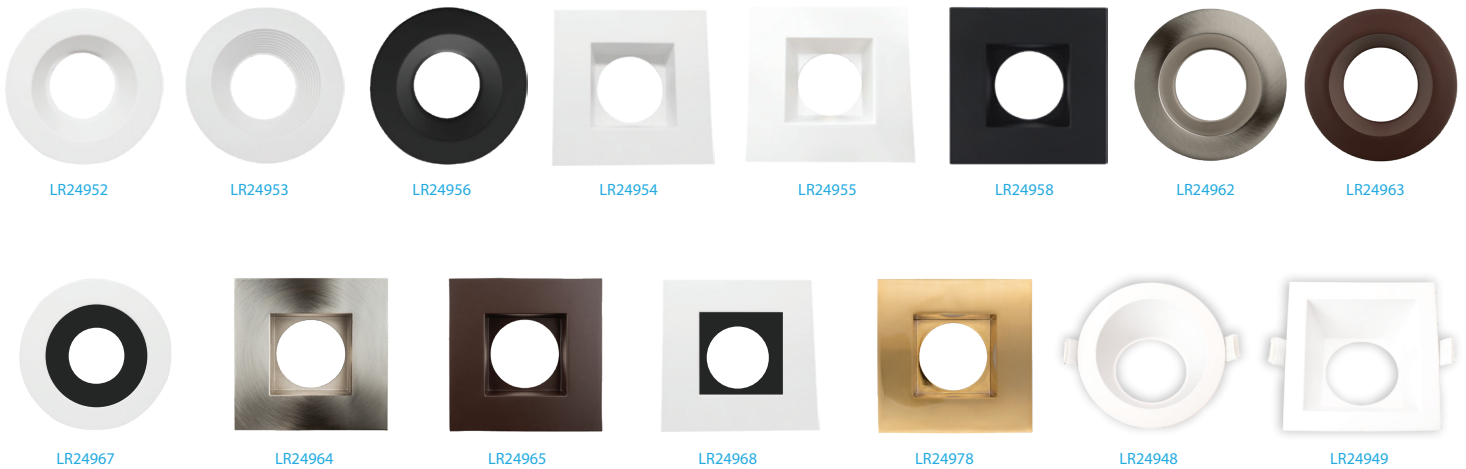

	MODEL	DESCRIPTION	FINISH
ROUND	LR24952	LED/DLMD4/TRIM/RD/W	ROUND SMOOTH WHITE
	LR24953	LED/DLMD4/TRIM/RD/B/W	ROUND BAFFLED WHITE
	LR24956	LED/DLMD4/TRIM/RD/BK	ROUND SMOOTH BLACK
	LR24962	LED/DLMD4/TRIM/RD/BN	ROUND SMOOTH BRUSHED NICKEL
	LR24963	LED/DLMD4/TRIM/RD/BZ	ROUND SMOOTH BRONZE
	LR24967	LED/DLMD4/TRIM/RD/BK/WT	ROUND SMOOTH BLACK/WHITE
	LR24948	LED/DLMD4/TRIM/WW/RD/W	ROUND WHITE WALL WASHER
SQUARE	LR24954	LED/DLMD4/TRIM/SQ/W	SQUARE SMOOTH WHITE
	LR24955	LED/DLMD4/TRIM/SQ/B/W	SQUARE BAFFLED WHITE
	LR24958	LED/DLMD4/TRIM/SQ/BK	SQUARE SMOOTH BLACK
	LR24949	LED/DLMD4/TRIM/WW/SQ/W	SQUARE WHITE WALL WASHER

INTERCHANGEABLE TRIMS



	MODEL	DESCRIPTION	FINISH
SQUARE	LR24964	LED/DLMD4/TRIM/SQ/BN	SQUARE SMOOTH BRUSHED NICKEL
	LR24965	LED/DLMD4/TRIM/SQ/BZ	SQUARE SMOOTH BRONZE
	LR24968	LED/DLMD4/TRIM/SQ/BK/WT	SQUARE SMOOTH BLACK/WHITE
	LR24978	LED/DLMD4/TRIM/SQ/BRS	SQUARE SMOOTH BRASS

COMPATIBLE WITH:

LR35126
Emergency LED Driver



LR41004
New Construction Mounting Plate



KNOCKOUT SIZE

#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)


LR41010
New Construction Mounting Plate



KNOCKOUT SIZE

#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95 mm)

KNOCKOUTS



KNOCKOUT SIZE

#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132 mm)
#R3	Ø6.25" (Ø160 mm)

LR41006
New Construction Mounting Plate



KNOCKOUTS

#0	#1	#2	#3	#4	#5
#0	Ø2.12" (Ø54 mm)				
#1	Ø3.15" (Ø80 mm)				
#2	Ø3.75" (Ø95 mm)				
#3	Ø4.25" (Ø108 mm)				
#4	Ø5.25" (Ø132 mm)				
#5	Ø6.25" (Ø159 mm)				

120-277V DRIVER

*SOLD SEPARATELY

	MODEL	DESCRIPTION	POWER	INPUT
15W	LR24969	LED/DLMD4/DRIVER/UNV/0-10V	15	120-277V

