

## EDGE~~X~~ SERIES | EmergiLED ES1206

EdgeX, Edgelit Emergency series are available in Exit & Exit Emergency Combo as well as NYC approved models. It is designed for multiple installation applications that allows surface ceiling, recessed ceiling, surface wall & recessed wall installations. The EdgeX series are provided with a surface mount kit with canopy and a recessed box for universal mounting as well as a single-sided clear background lens panel and double-sided mirror lens panel for easy stocking and ordering.



## SPECIFICATIONS


CONSTRUCTION	EXTRUDED ALUMINIUM, CLEAR ACRYLIC PANEL OR DOUBLE-FACE MIRROR PANEL
LETTERING	RED OR GREEN 6" HEIGHT AND 3/4" STROKE, RED 8" HEIGHT WITH 1" STROKE FOR NYC MODELS.
INPUT VOLTAGE	120/277V AC
INPUT FREQUENCY	50/60 Hz
OPERATING TEMPS.	13°F TO 122°F
ENVIRONMENT	TYPE 20 DAMP LOCATION
RATED LIFE	50,000 HOURS
CERTIFICATION	UL
WARRANTY	3 YEAR LIMITED

## FEATURES & OPTIONS


- Available in 4 different models, Exit, NYC Exit, Exit Emergency Combo, NYC Exit Emergency Combo.
- UL 924 Listed for Damp Location applications.
- Maintenance free Ni-cad battery.
- Brownout protection, low voltage disconnect, overload disconnect, short circuit disconnect, solid state transfer.
- UL listed 90 minute emergency run time, 24 hour recharge time.
- All models come standard with Test Switch & Charge Indicator light.
- All models can be universally mounted ceiling surface or recessed & wall mounted.
- All models include single-face clear acrylic & double-face mirror panels.
- Exit & Exit Emergency models available with red or green or lettering.
- NYC Exit/Emergency model is available in brushed aluminium, black & white finish.
- Exit & NYC Exit models are remote-capable, NYC Exit/Emergency model is available with remote capability.

## EXIT


### SURFACE CEILING MOUNT

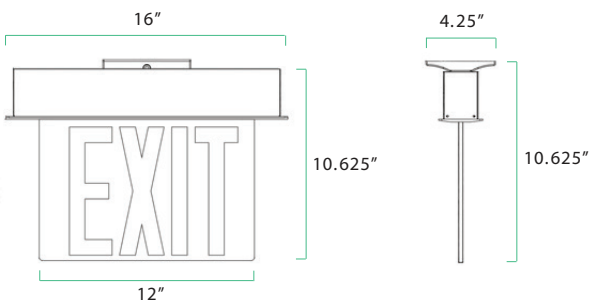


### SURFACE WALL MOUNT

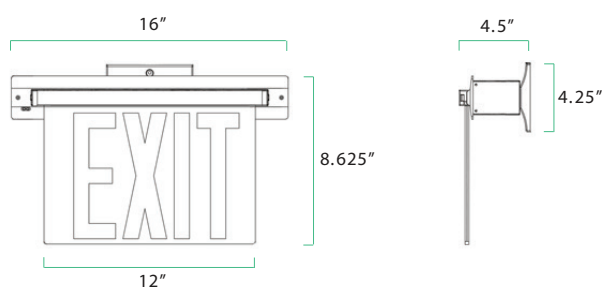

### RECESSED CEILING MOUNT

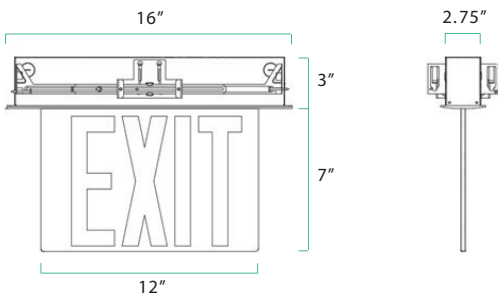


### RECESSED WALL MOUNT

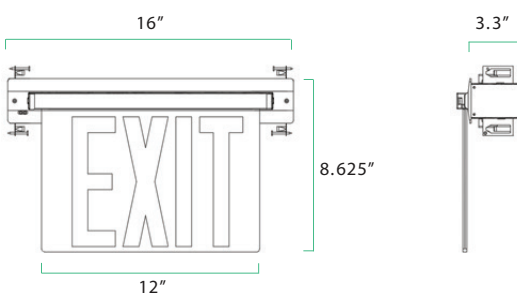


MODEL	LETTER ILLUMINATION WATTS
EX624	2.5

EXIT EMERGENCY COMBO


SURFACE CEILING MOUNT

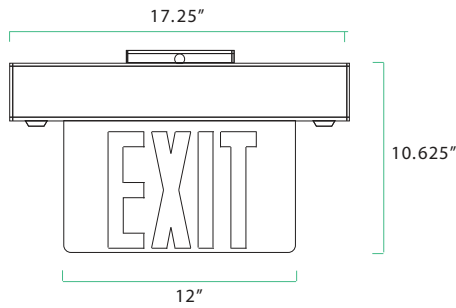


SURFACE WALL MOUNT

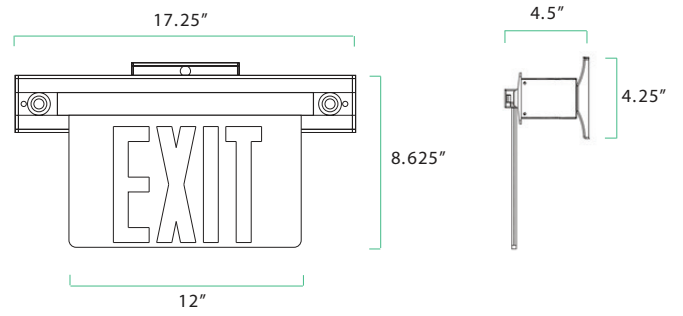

RECESSED CEILING MOUNT

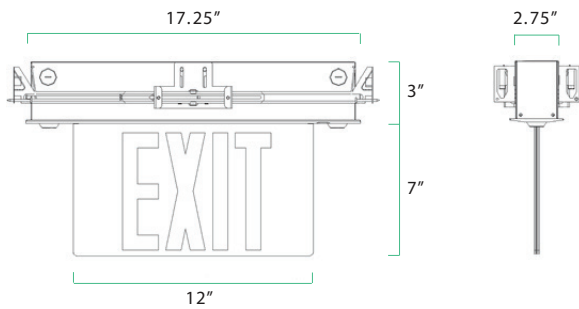


RECESSED WALL MOUNT

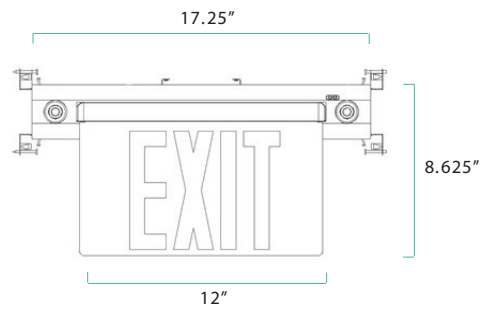


MODEL	LETTER ILLUMINATION WATTS	EMERGENCY ILLUMINATION WATTS (PER HEAD)	EMERGENCY ILLUMINATION LUMENS (PER HEAD)
EX627	2.5	1.5	125

MOUNTING SPACE DISTANCE

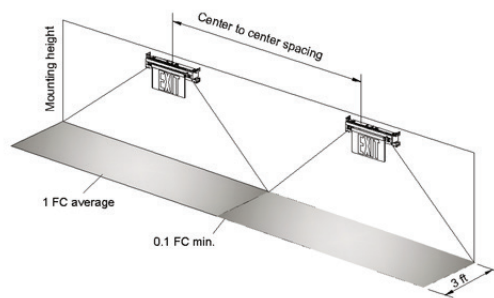

7.5' HEIGHT / 3' WIDE PATH	24'
10' HEIGHT / 3' WIDE PATH	25'

PHOTOMETRICS

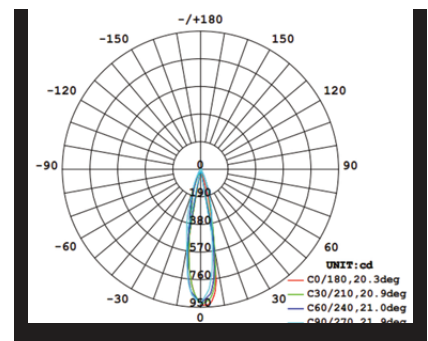


ORDERING GUIDE


SERIES	MODEL	LETTERING
EX	624 (Exit Remote Capable)	G (Green)
	627 (Exit/Emergency)	R (Red)

NYC EXIT/EMERGENCY COMBO


SURFACE CEILING MOUNT

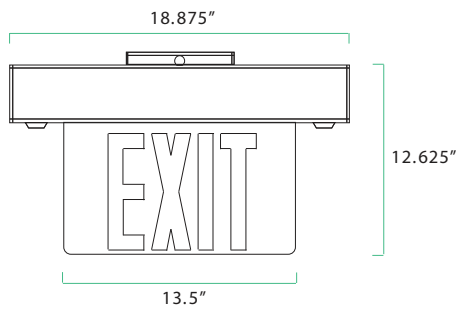


SURFACE WALL MOUNT

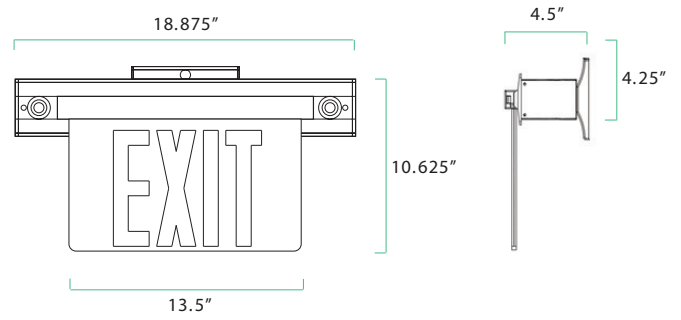

RECESSED CEILING MOUNT

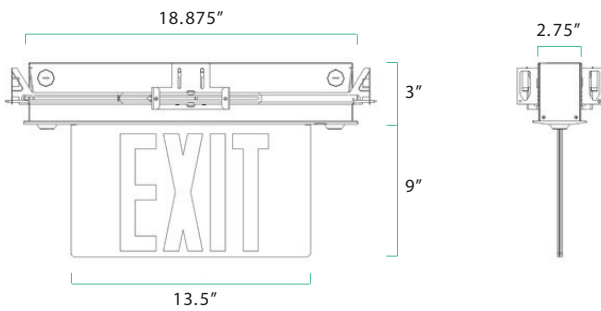


RECESSED WALL MOUNT

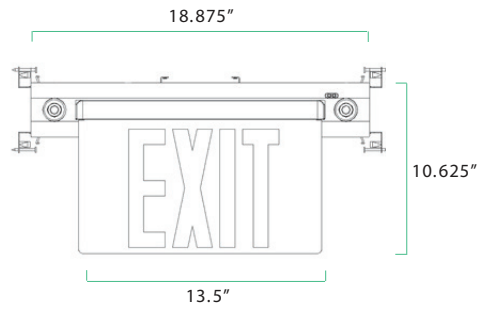


MODEL	LETTER ILLUMINATION WATTS	EMERGENCY ILLUMINATION WATTS (PER HEAD)	EMERGENCY ILLUMINATION LUMENS (PER HEAD)
NYEX607	2.5	1.5	125

MOUNTING SPACE DISTANCE

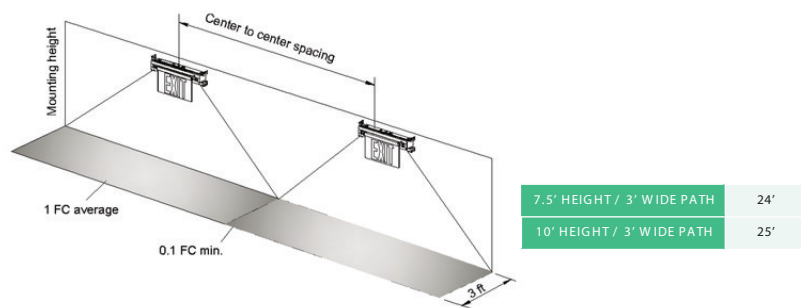


PHOTOMETRICS

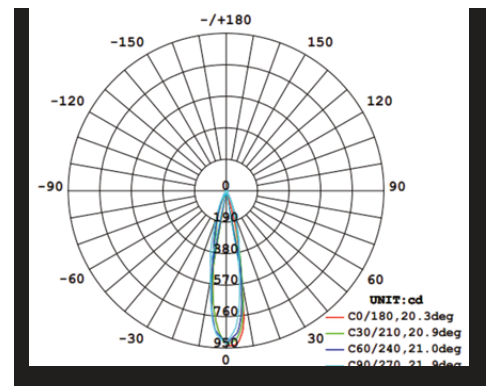


**NYC EXIT**


**SURFACE CEILING MOUNT**

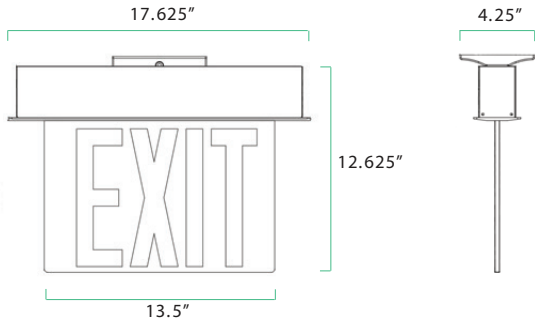


**SURFACE WALL MOUNT**

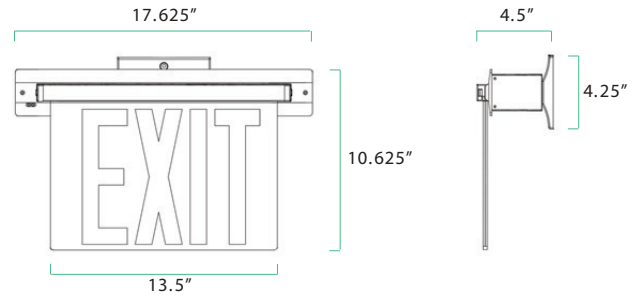

**RECESSED CEILING MOUNT**

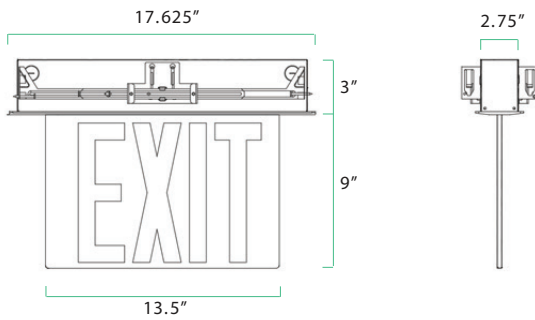

**RECESSED WALL MOUNT**

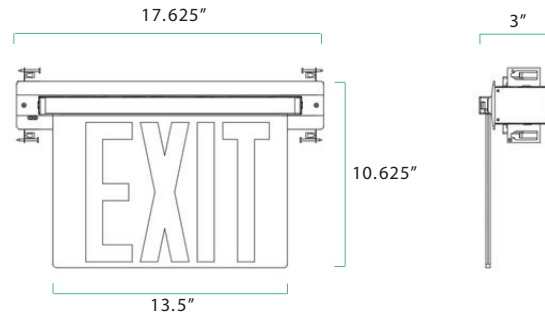

MODEL	LETTER ILLUMINATION WATTS
NYEX604	2.5



**ORDERING GUIDE**

SERIES	MODEL	FINISH (FOR 607)	REMOTE CAPABLE OPTION (FOR 607)
NYEX	604 (Exit Remote Capable)	BLANK (brushed aluminium)	RC
	607 (Exit/ Emergency)	W (white) B (black)	

**ACCESSORIES**

MODEL	DESCRIPTION
ACRYLIC MIRROR-604/ 607	Single- sided mirrored panel for NYEX604/ 607