

Project Name: _____
Date: _____ Note: _____

LED Canopy Light LC1001




Application: Parking structures, storage areas, shopping area walkways, entryway, low roof security and much more

Feature:

- Fins design, advective grooves between fins are good for heat dissipation
- Die-cast aluminum housing with die-cast backbox with four conduit entry points and knockout pattern for junction box or direct wall mounting. Hinged door for easy re-assembly
- Ingress Protection rating of IP65 for dust and water
- High-temperature silicone gaskets
- Wide beam angle to 155° and lighting transmission rate of lens is over 90%

Certifications




SPECIFICATIONS:


SKU	HYA-GC-40W-P-5000K	HYA-GC-70W/60W/40W-CCT
Model No.	TS-GCP1040-40W-G-50K	TS-GCP1070-70W-G-H-TCP
Wattage	40W	70W/60W/40W Adjustable
CCT	5000K	3000/4000/5000K Selectable
Mounting Height	8' to 15'	
Lamp Bead Model	Samsung	
Lighting Angle	155°	
Lighting Efficiency	130 Lm/W	
Color Rendering Index	Ra>70	
Working Temperature	-40 °F ~+104 °F / -40 °C ~+40 °C	
Option	N/A	with sensor base
Environment Location	IP 65 - Wet Location	
Lifespan	≥ 50000H	
Lampshell	DARK BROWN	
DLC ID	P8MGTOX9	S-C9FQUD
Package Info	10.39"x4.4"x10.5"	11.89"x5.52"x11.62"
PC/Master Pack	264x112x266 mm	302x140x295 mm
Master Package Info	6	4
Master Package Weight	21.46"x18.43"x11.4" 545x4687x290 mm	23.04"x12.48"x12.41" 585x317x315 mm
	26.34 LB	28.35 LB

Dimensions




40 W

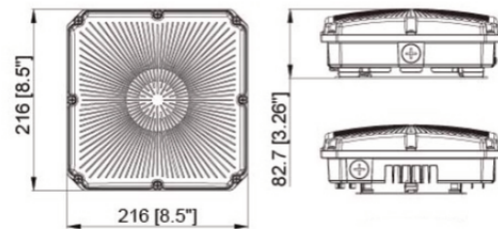

70 W

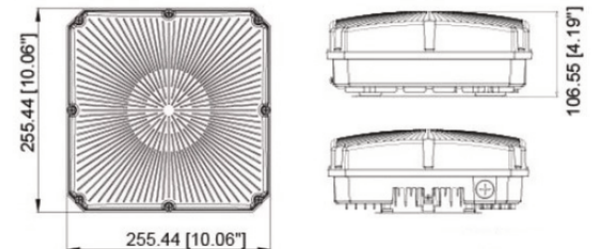

Optional Sensor




LED Canopy Light LC1001


Installation

CCT & WATTAGE SELECTABLE INSTRUCTION


1. Use a large screwdriver to screw out the rubber plug in the middle.

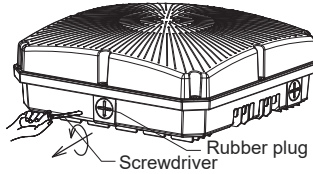

2. Finger through the thread hole to dial the CCT and Wattage Switch to the specified color temperature and Wattage.

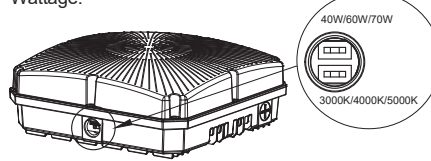


3. Use a large screwdriver to tighten the rubber stopper in the middle.

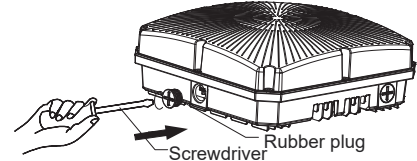


Installation method I : Ceiling Installation


1. Loosen the screw to take off the mounting plate from the lamp.

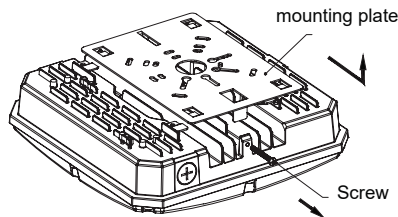


2. Use screws to lock the mounting plate on the embedded junction box.

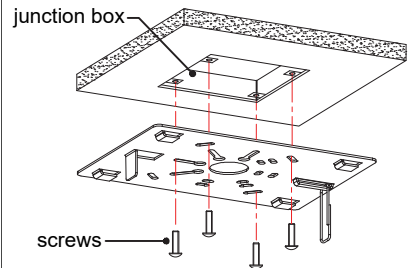


3. Hang the lamp on the ring so as to connect wires with terminal caps.

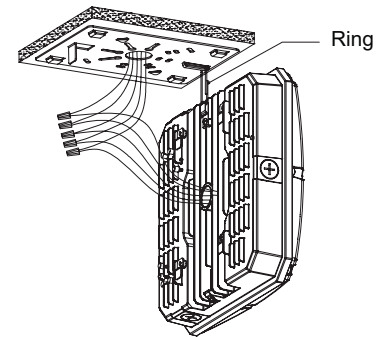

4. Hook up lamp on the mounting plate.

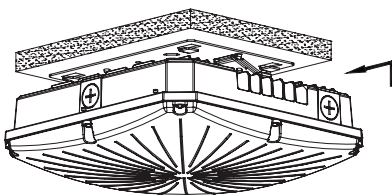

5. Secure the screw. Installation complete

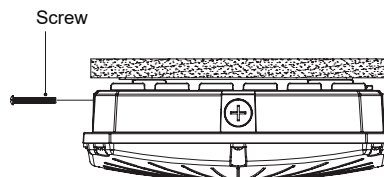


Input/Dimmer	Lamp
Green	Green
White	White
Black	Black
Dim-	Pink
Dim+	Purple

this connection can be omitted if with non-dim driver 0-10V Dimming

Installation method II: Pole-pendent Installation

1. Connecting wires with terminal caps picture shows

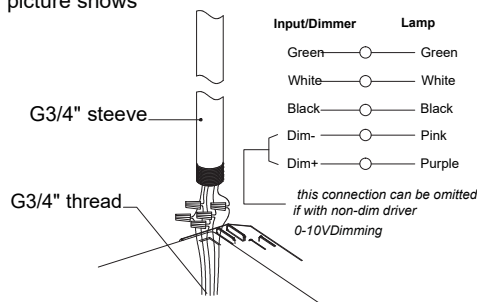

2. Rotating the steeve to make it fixed with lam Installation completed.

