


LED SHOP LIGHT LL3004



Application: residential garage, basement, supermarket, warehouse, office, factory, commercial and industrial space

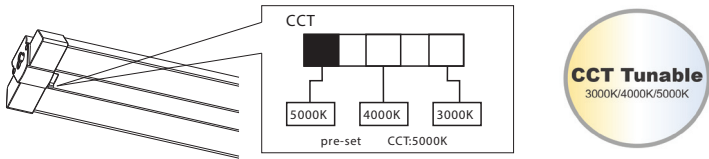

Certifications




FEATURE

- Easy Installation and connection
- Body: Aluminum Heat sink for Efficient Heat Dissipation
- Linkable: with wire harness connection kit included for connecting power between fixtures
- CCT adjustable switch on front of the fixture

SPECIFICATIONS

Model No	HY-4FT-LSP-30W-30K/40K/50K
Power	30W
Input Voltage	AC 110-277V
Luminous Flux	4156.93 LM
Efficacy	130 LM/W
Power Factor	>0.9
CCT	CCT Selectable: 3000K/4000K/5000K
CRI	>80
Working Life	>50,000 hours
Working Temperature	-10°F to 105°F
Protection Level	Dry/Damp Location
DLC Family Code	P5ODDZJQ
Qty/Pack	10
Master Package Size	47.83" x 8.66" x 7.87"
Master Package Weight	24.91 LB

ACCESSORIES


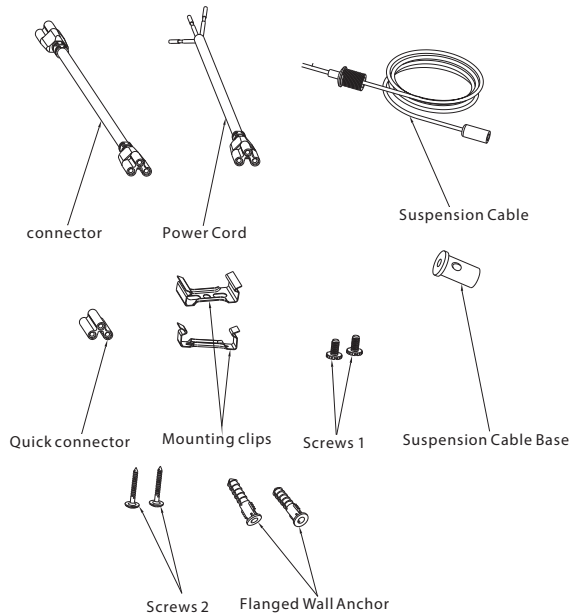


ORDERING CODE DEFINITION

EXAMPLE: HY-4FT-LSP-30W-30K/40K/50K





Company Code	Length	Product	Wattage	CCT
HY	4FT	LSP: Linear Shop Light	30W	CCT Tunable 3000K 4000K 5000K

PRODUCT DIMENSIONS




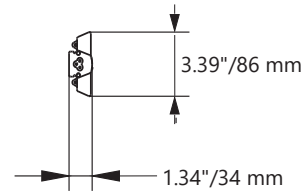
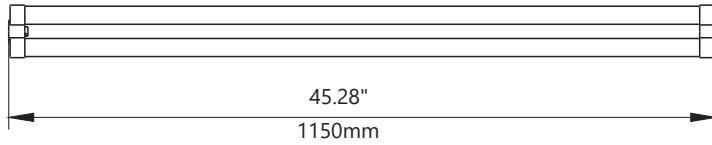


INSTALLATION INSTRUCTION

SURFACE MOUNT INSTALLATION

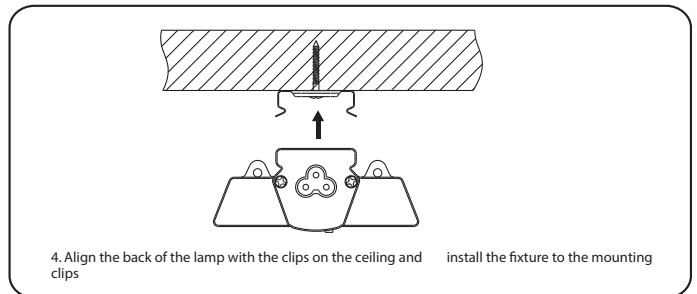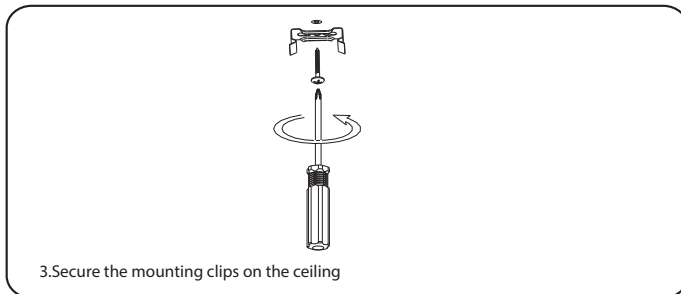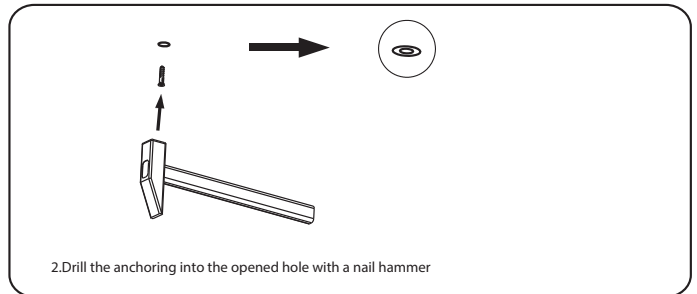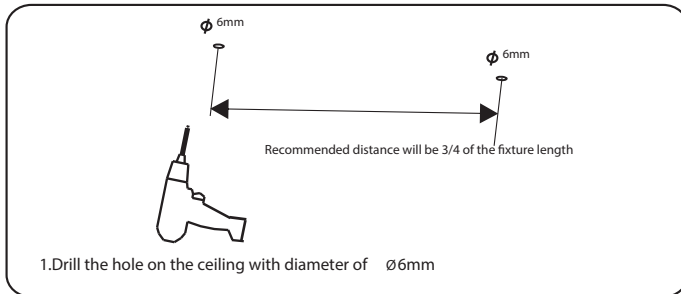

SUSPENDED MOUNT INSTALLATION

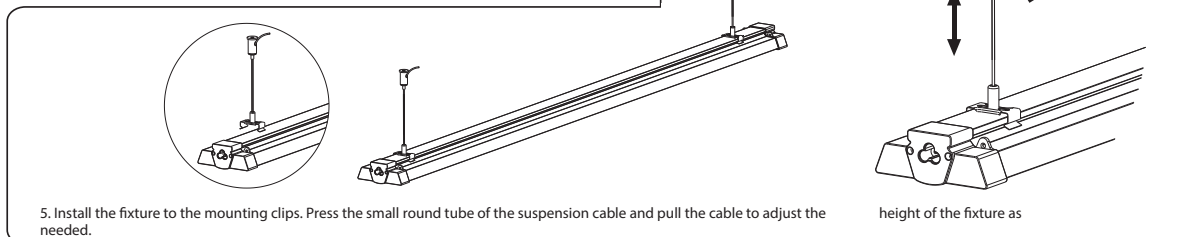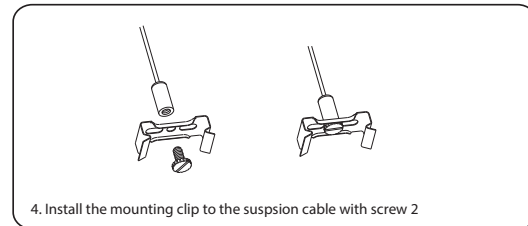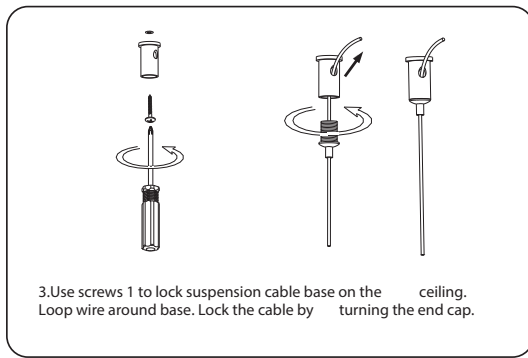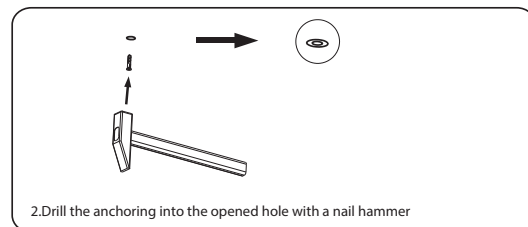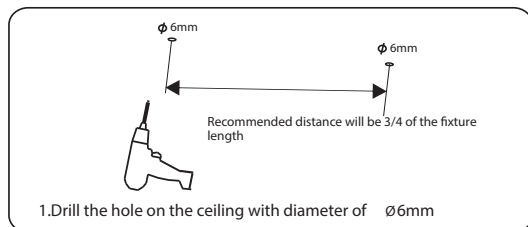


INSTALLATION INSTRUCTION


CONNECTION GUIDE

1. Please find the connector in the accessories bag.
2. Plug the connector into the tube.


Note:
For safety standard,
please do not connect more than 4pcs 4ft LED lamp in a row; do not
connect more than 3 pcs 8ft LED lamp in a row.

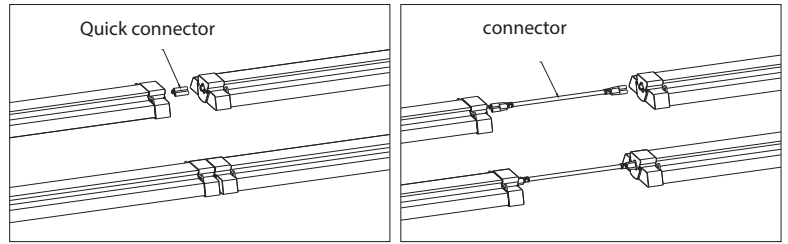

WIRING

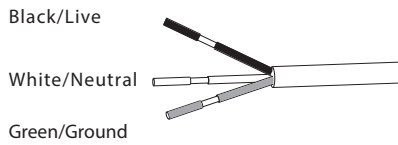


CCT ADJUSTABLE GUIDE

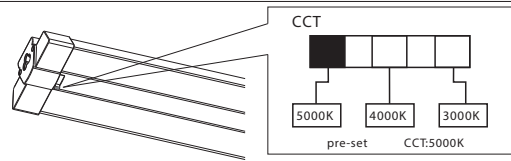

This Fixture has three color temperature of (3000K, 4000K, 5000K) and CCT can be adjusted by the switch on the front of the fixture.


PHOTOMETRIC REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

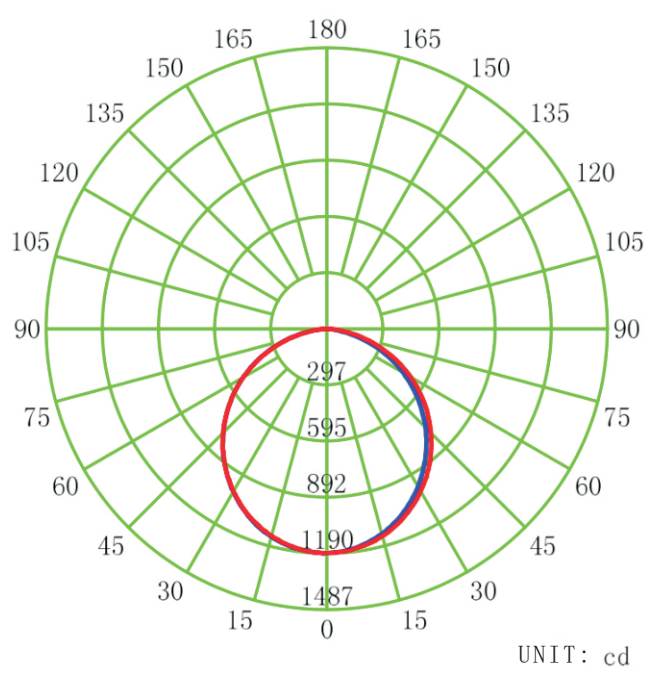

— C0-C180 — C90-C270

VERTICAL EQUILUMINOUS CURVE

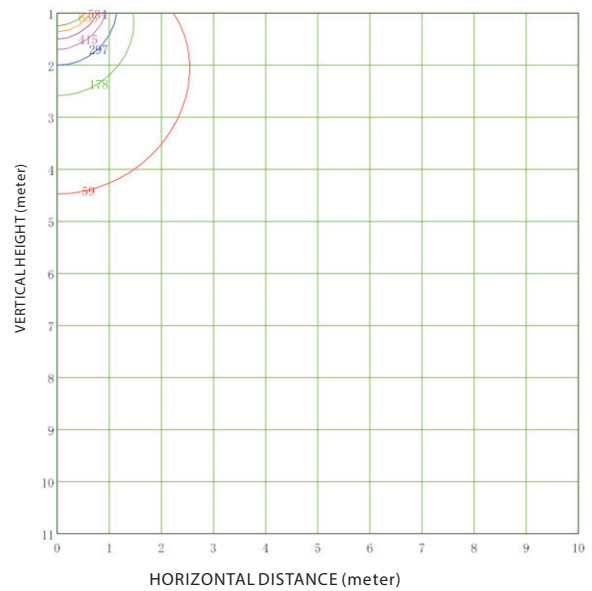

MINIMUM ALTITUDE 1.0 M
MAXIMUM ALTITUDE 11.0 M
MAXIMUM ILLUMINATION 1186.8 lx

- (5%): 59.3 lx
- (15%): 178.0 lx
- (25%): 296.7 lx
- (35%): 415.4 lx
- (45%): 534.1 lx
- (55%): 652.7 lx
- (65%): 771.4 lx