

LED Surface Mount Backlit Panel- PL5008



Application: Offices, Schools, Showrooms, Airports, Retail stores and Healthcare facilities, etc.




Feature

- 360° light emitting, uniform and comfortable diffused light;
- 50,000 hours life design for driver and LED;
- 5 years warranty

Specifications

Model No.	HY-SMDPB-30W2FT-3CCT(XX)	HY-SMDPB-40W4FT-3CCT(XX)
Power	30W	40W
Size	1'X2'	1'X4'
Input Voltage	120vac, 60Hz	
Lumens	100 LM/W	
Protection Rating	IP20(For Indoor Use Only)	
Power Factor	>0.7	
Beam Angle	120°	
CCT	3000k/4000k/5000k	
CRI	>80	
Working Lift	Lumen Maintenance over 70% @ 50,000+ hours	
Oper. Temperature	-13 ~+113 / -25 ~+45	
Certification	ETL	
Qty/Pack	2 pcs	
Package Size	26.2"x6.1"x14.4"	50"x6.1"x14.39"
Package Weight	9.5 lbs	15.1 lbs

Dimension

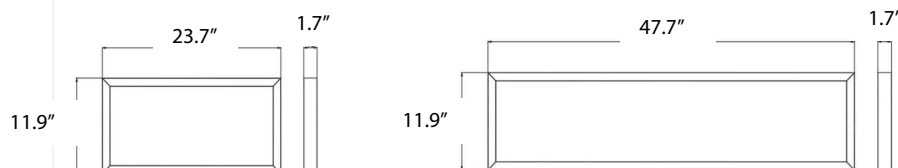

LED Surface Mount Backlit Panel- PL5008



Application: Offices, Schools, Showrooms, Airports, Retail stores and Healthcare facilities, etc.

Feature

- 360° light emitting, uniform and comfortable diffused light;
- 50,000 hours life design for driver and LED;
- 5 years warranty

Specifications

Model No.	HY-SMDPB-30W2FT-3CCT(XX)	HY-SMDPB-40W4FT-3CCT(XX)
Power	30W	40W
Size	1'X2'	1'X4'
Input Voltage	120vac, 60Hz	
Lumens	100 LM/W	
Protection Rating	IP20(For Indoor Use Only)	
Power Factor	>0.7	
Beam Angle	120°	
CCT	3000k/4000k/5000k	
CRI	>80	
Working Lift	Lumen Maintenance over 70% @ 50,000+ hours	
Oper. Temperature	-13 ~+113 / -25 ~+45	
Certification	ETL	
Qty/Pack	2 pcs	
Package Size	26.2"x6.1"x14.4"	50"x6.1"x14.39"
Package Weight	9.5 lbs	15.1 lbs

Dimension

